



TWIN DRUM


200L

The Twin Drum is a high-quality, reusable, double-walled drum with UN and DOT approval. That makes it capable for handling of high-purity liquids in chemical, pharmaceutical and semiconductor industries.

Benefits

- Very low content of trace metals and particles in the inner liner – semiconductor grade < 100 ppt
- Traceability identification label
- All-round protection against environmental influences
- Double L-Ring, for high stability and easier handling
- High vapor pressure
- Minimal residual liquid
- UN and DOT approved X Packaging Group I, 320kpa tested
- Doppie walled design – secondary containment
- Specially designed for Nitric Acid
- Recyclable

Maximum safety with RIKUTEC-Solutions

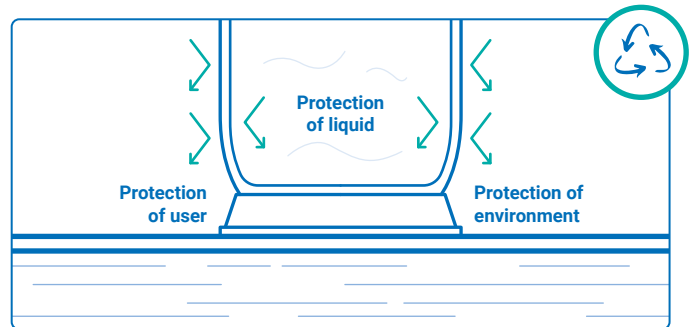

Accessories



1 Universal Key



2 Dip tube S62x5

- available with compensator for better chemical dispensing
- key-coded system



3 Dispensing head

- Availability of simultaneously filling and extraction

TECHNICAL DATA SHEET

TWIN DRUM 200L

| Specifications | Twin Drum |
|-------------------------------------|--|
| Material Inner layer of inside drum | HDPE without any stabilizers or additives |
| Material Outer layer of inside drum | HDPE |
| Material outer drum | HDPE |
| Transport quantity | 192 (Europe) or 208 (USA) per truck (8 per Pallet) 200 per Container 40ft |
| Bungs | 2x S62 x 5mm / 2x2" modified buttress (1 vented and 1 non-vented) |
| Standard color | Blue |
| Nominal capacity | 196 liter / approx. 53 gal. |
| Height | 585 x 963mm / approx. 23 in. x 37,9 in. |
| Pallet stacking (empty) | Max. 3 pallets high |
| Pallet stacking (full) | 2 pallets high |
| Weight | +/- 16 kg / approx. 35.3 lb |
| Prepared for extractor tubes | Quick Connect, Entegris |
| Approvals | |
| UN certification | 6HH1/X1.9/320/.../D/BAM/14926 - RIKUTEC |
| DOT certification | 6HH1/X1.9/250/**/USA/+AA9938 |
| Standard liquid approvals | |
| | Density kg/l |
| Water | 1.9 |
| Wetting solution normal Butylacetat | 1.2 |
| Acetic acid | 1.2 |
| Nitric acid 69% | 1.4 |
| White Spirit | 1.2 |

RIKUTEC Germany

RIKUTEC Germany GmbH & Co. KG
 Graf-Zeppelin-Straße 1-5
 57610 Altenkirchen | Germany
 T +49 2681 9546 0 | F +49 2681 9546 33
 info@rikutec.de | www.rikutec.de

RIKUTEC America

2510-B W. Whitner St.
 Anderson, SC 29624 | USA
 T +1 508 234 7300
 info@rikutec.com | www.rikutec.com

RIKUTEC Asia LLC

Tower B-415, GwaCheon SangSang Jai,
 456 Galhyeon-dong, Gwacheon-si,
 13840 Gyeonggi-do | Republic of Korea
 T +82 2 797 0701
 info@rikutec.asia | www.rikutec.asia